

EX-G089B

1x2 HDMI 1.3 Distribution Amplifier

User Manual





Safety and Notice

The **EX-G089B 1x2 HDMI 1.3 Distribution Amplifier** has been tested for conformance to safety regulations and requirements, and has been certified for international use. However, like all electronic equipments, the EX-G089B should be used with care. Please read and follow the safety instructions to protect yourself from possible injury and to minimize the risk of damage to the unit.

- Follow all instructions and warnings marked on this unit.
- Do not attempt to service this unit yourself, except where explained in this manual.
- Provide proper ventilation and air circulation and do not use near water.
- Keep objects that might damage the device and assure that the placement of this unit is on a stable surface.
- Use only the power adapter and power cords and connection cables designed for this unit.
- Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.

Introduction

The **EX-G089B 1x2 HDMI 1.3 Distribution Amplifier** provides the most cost effective and advanced HDMI 1.3 splitter solution on the market, by which the high definition video and high quality audio can be transmitted to 2 different locations without losing quality. With built-in USB firmware update mechanism, the compatibility among countless HDMI sources and receivers can be further guaranteed. With 12 bit deep color video and high definition audio support, EX-G089B is suitable for high quality A/V broadcasting, digital signage and education applications!

Features

- HDMI 1.3c and DVI 1.0 compliant
- HDCP 1.2 compliant
- Wide Frequency Range: 25MHz~225MHz
- Video bandwidth: 6.75GBPS
- Supports conversion of HDMI signaling to DVI
- Resolution up to 1080p or WUXGA
- Automatic EDID learning
- Supports xvYCC
- Supports CEC (not bypassing)*
- USB firmware update for expanding compatibility
- Supports Dolby Digital, DTS-HD and Dolby True HD audio
- Easy installation



Automatic EDID learning will detect all the connected HDMI equipped monitors and analyze all the content of EDID. The EDID with minimal resolution support will be the reference EDID for incoming HDMI source players.


* Depends on models

Specifications & Package Contents

Model Name	EX-G089B
Technical	
HDMI compliance	HDMI 1.3c [Deep Color, xvYCC color space supported]
DVI compliance	DVI 1.1
HDCP compliance	Yes
Video bandwidth	Single-link 225MHz [6.75Gbps]
Video support	Up to WUXGA [1920x1200@60Hz] & UXGA [1600x1200@60Hz]
Audio support	DTS-HD Master Audio, Dolby TrueHD Dolby Digital, DTS, DVD-Audio, LPCM, SACD, MPCM
ESD protection	[1] Human body model — ±15kV [air-gap discharge] & ±8kV [contact discharge] [2] Core chipset — ±2kV
PCB stack-up	4-layer board [impedance control — differential 100Ω; single 50Ω]
USB firmware updatable	YES
Input TMDS signal	1.2 Volts [peak-to-peak]
Input DDC signal	5 Volts [peak-to-peak, TTL]
Input	1x HDMI [7.1ch audio & video]
Output	2x HDMI [7.1ch audio & video]
HDMI connector	Type A [19-pin female]
Mechanical	
Housing	Metal
Dimensions (L x W x H)	Model: mm [] Package: mm [] Carton: 495 x 440 x 380mm [1'7.5"x1'5.3"x1'3"]
Weight	EX-G089B: g [lbs] / Package: g [lbs]
Fixedness	Wall-mounting case with screws upon request
Power supply	Inter-lock 5V 2A DC
Power consumption	4 Watts [max]
Operation temperature	0~40°C [32~104°F]
Storage temperature	-20~60°C [-4~140°F]
Relative humidity	20~90% RH [no condensation]
Package Contents	1x EX-G089B 1x 5V power adapter 1x User Manual

Panel Descriptions

Rear Panel

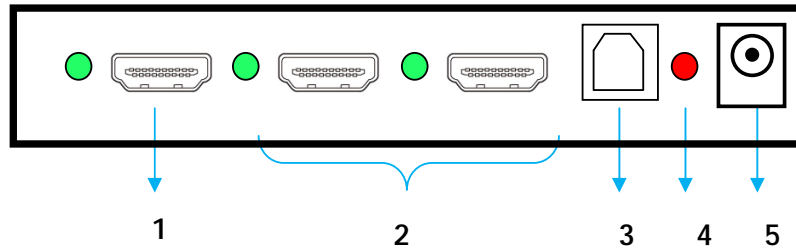

1. **HDMI IN:** HDMI input source
2. **HDMI OUT:** Distributed HDMI outputs
3. **USB IN:** For firmware update use only
4. **Power Indicator:** When power on, the LED will blink.
5. **DC IN:** 5V 2A




When the connected HDMI equipped monitor is verified as HDMI and HDCP compliant, the corresponding green LED will blink.

Hardware Installation

Broadcasts HDMI signal to 2 HDMI displays!

1. Switch off all devices, including monitors.
2. Connect to the receivers.
3. Connect an HDMI source (such as a Blu-ray Disc player) to the HDMI In.
4. Plug in 5V DC power supply.
5. Power on the HDMI monitors.
6. Power on the HDMI source.

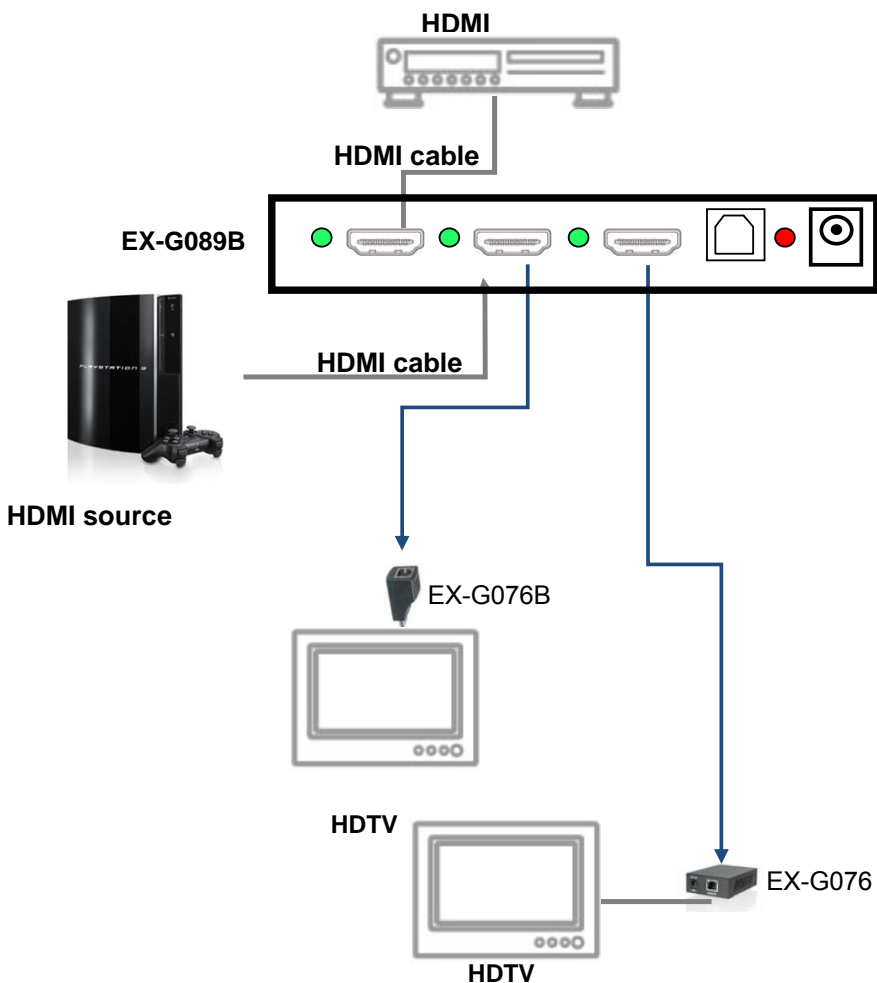

Notice

1. While connecting a new monitor to the splitter, experiencing a short period of time no display may be expected. Automatic EDID learning will analyze the newly connected monitor to see if the EDID for the HDMI input is necessary to update!
2. For long range high definition HDMI transmission applications, please adopt CAT-5 cable based HDMI extenders.

Limited Warranty

The SELLER warrants the **EX-G089B 1x2 HDMI 1.3 Distribution Amplifier** to be free from defects in the material and workmanship for 1 year from the date of purchase from the SELLER or an authorized dealer. Should this product fail to be in good working order within 1 year warranty period, The SELLER, at its option, repair or replace the unit, provided that the unit has not been subjected to accident, disaster, abuse or any unauthorized modifications including static discharge and power surges.

Unit that fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for 90 days from the day of reshipment to the BUYER. If the unit is delivered by mail, customers agree to insure the unit or assume the risk of loss or damage in transit. Under no circumstances will a unit be accepted without a return authorization number.

The warranty is in lieu of all other warranties expressed or implied, including without limitations, any other implied warranty or fitness or merchantability for any particular purpose, all of which are expressly disclaimed.

Proof of sale may be required in order to claim warranty. Customers outside Taiwan are responsible for shipping charges to and from the SELLER. Cables are limited to a 30 day warranty and cable must be free from any markings, scratches, and neatly coiled.

The content of this manual has been carefully checked and is believed to be accurate. However, The SELLER assumes no responsibility for any inaccuracies that may be contained in this manual. The SELLER will NOT be liable for direct, indirect, incidental, special, or consequential damages resulting from any defect or omission in this manual, even if advised of the possibility of such damages. Also, the technical information contained herein regarding the EX-G089B features and specifications is subject to change without further notice.